



2005/2006 Mustang Hood Strut Kit CDC # 110905

Note: Read installation instructions before starting.



Kit Components:

- 1 – Driver Side Body Bracket w/Ball Mount
- 1 – Pass. Side Body Bracket w/Ball Mount
- 1 – Driver Side Hood Bracket w/Ball Mount
- 1 – Pass. Side Hood Bracket w/Ball Mount
- 2 - Gas Struts


Tools Needed:

- Flat Screwdriver
- 1/4" Drive Ratchet
- 1/4" Drive 2" Extension
- 1/4" Drive, 10mm Socket

CD4II3AO

Installation of Hood Struts:

1. Raise hood and prop open.
2. Remove the exposed fender bolts immediately forward of the hood hinge (one per side).
3. Install Body Bracket w/Ball Mount under bolts, on their respective sides.

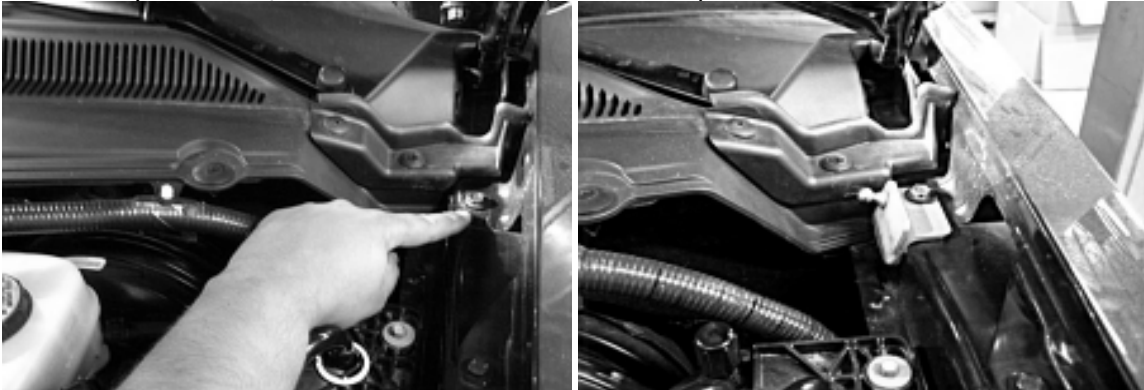

Note:

Perform the following steps on one side of the hood at a time. Make sure that hood is properly supported before continuing!

4. Of the 2 bolts that secure hinge to hood, remove the forward most bolt.
5. Loosen the rear bolt approximately 3/16" OR enough to allow the Hood Bracket w/Ball Mount to slide into place. Place the Hood Bracket w/Ball Mount between the hinge and bolt head **NOT** between the hinge and the hood.



6. Reinstall the forward bolt through the Hood Bracket w/Ball Mount and thread into hood. Tighten both hood bolts.
7. Repeat steps 4 – 7 on the other side.
8. When all 4 Brackets are installed and tight, attach the Struts to the Ball Mounts on the Body Bracket and the Hood Bracket. The Struts are not side specific, you can install on either side. Rotate Strut end if needed to fit.
9. Re-route the rubber windshield washer hose to prevent pinching/damage.
10. Remove the factory Prop Rod from vehicle.
11. Lower hood slowly while checking alignment of hood. **Do not slam shut!** Adjust hood as needed.

Thank you for choosing Classic Design Concepts, LLC. for your restyling needs. If you have any questions or concerns regarding installation please contact Tech@classicdesignconcepts.com or call 248-624-7997.

ORIGINATOR: Jeff Carroll	REVISION DATE:	REVISION LEVEL: Release
APPROVAL: Sheila Davis	ISSUE DATE: 1-17-06	PAGE: 2 of 2